

FSW17H - BRONZE


Spark Resistant Flange Spreading Wedge and Pump

A Spark Resistant Hydraulic Flange Spreading Wedge actuated by the pump included in the kit.

The FSW17-Bronze flange spreading wedge can enter a flange joint access gap as small as 6mm and produce a maximum force of 326kN when used in pairs (as recommended) to push the mating faces of flanges apart.

The FSW17-Bronze can create a gap up to 81mm between flange faces with the stepped blocks fitted facilitating the replacement of gaskets, seal ring's, or other flange face maintenance and testing.

- 100% Load/Pressure tested and certified
- Spark Resistant High durability High Quality low Maintenance design
- Tool weight 7Kg
- Max Spreading force 163kN (326kN when used in pairs)
- Spreading distance 6mm to 81mm (when used with stepped blocks)
- Robust Moulded Case for easy transportation and storage

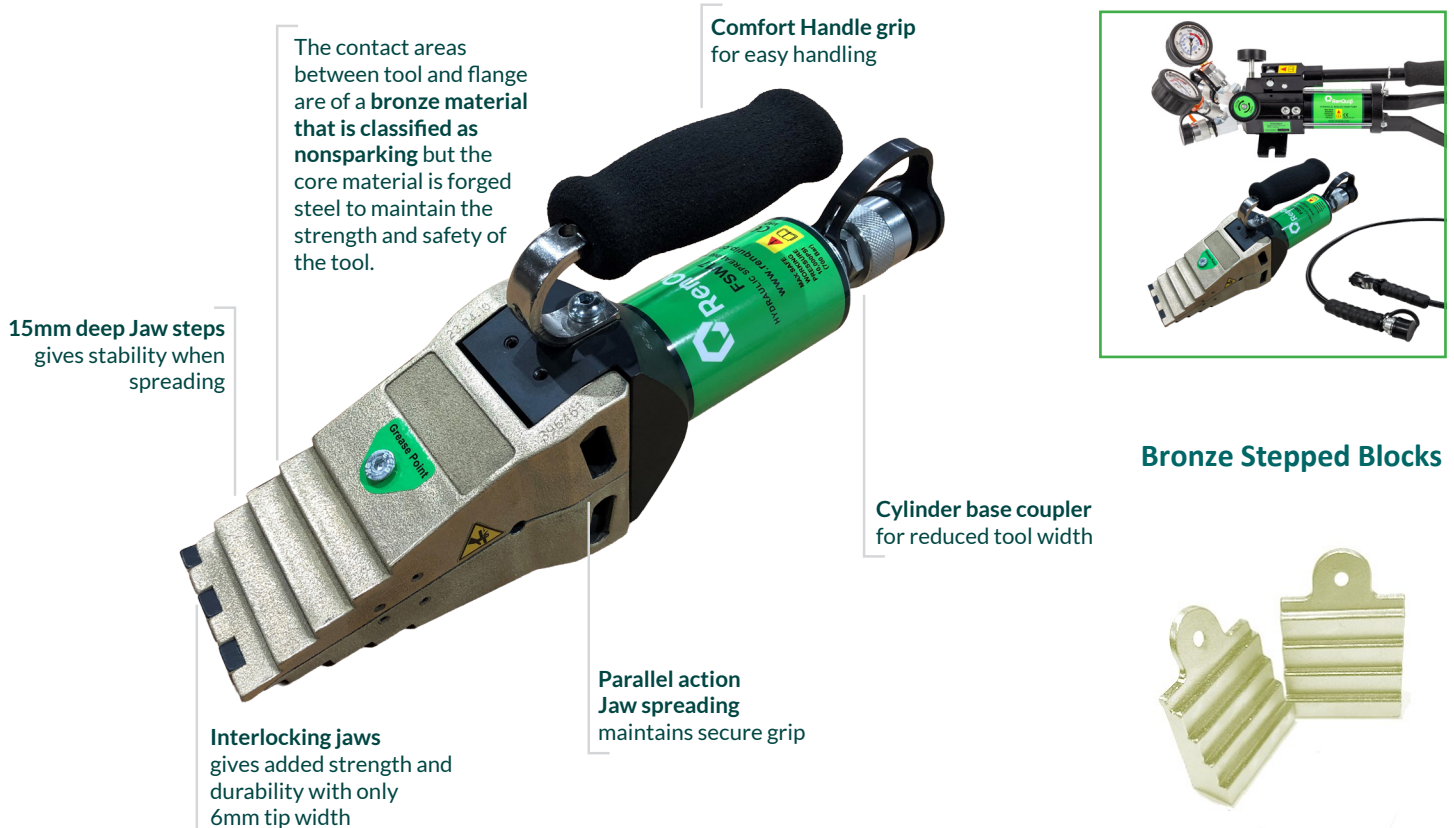

Bronze Stepped Blocks




Engineered Energy Equipment

Product Sales | Product Rental | Bespoke Solutions

www.renquip.com

FSW17H - BRONZE

Flange Spreading Wedge

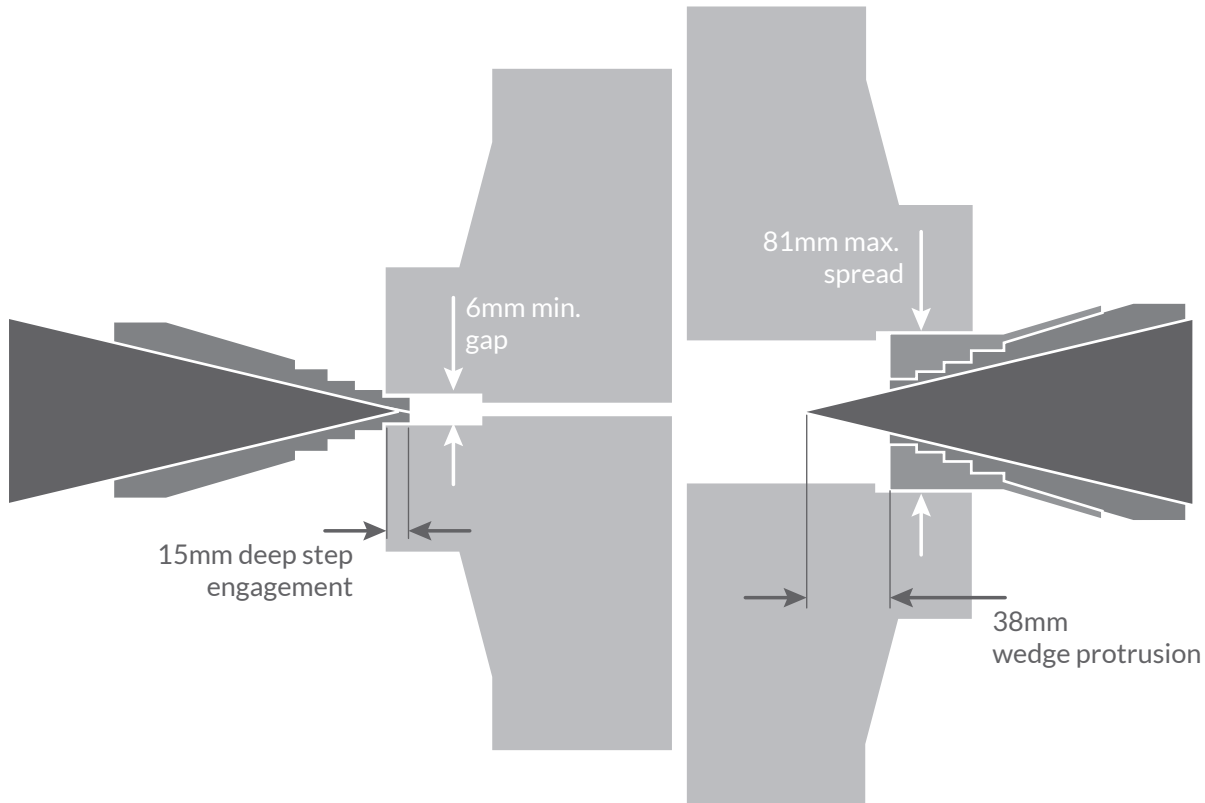

Kit weight: 17Kg

Kit Dims.: 580mm x 340mm x 180mm

Tool Weight: 7Kg

Tool Dims.: 76mm x 155mm x 350mm

Product ordering code: FSW17H-BRONZE

Kit Content

- 1 x FSW17 Bronze Jaw Tool
- 1 x PH300S Hydraulic Hand Pump
- 1 x Hydraulic Hose with Couplers
- 1 x Non Ferrous Safety Block
- 1 x Safety Lanyard
- 2 x Bronze Stepped Blocks with securing screws
- 1 x Instruction Manual
- 1 x Robust moulded carry case



Engineered Energy Equipment

Product Sales | Product Rental | Bespoke Solutions

www.renquip.com

Unit 1 Dunnottar House, Howe Moss Drive, Dyce, Aberdeen, AB21 0FN
+44(0) 1224001861 | info@renquip.com