



ATTACHMENTS & ACCESSORIES


A wide range of attachments and accessories make PneuTorques adaptable to many applications.



Single-sided reaction plate



Double-sided reaction plate



Cranked steel reaction plates



(19286)

Dual Trigger Module

A secondary trigger for use with all PTS™ and PTM tools. This requires the operator to use both hands to run the tool so reduces the risk of hands getting trapped between the reaction bar and reaction point



(19363 & 19448*)

Secondary Handle*

The secondary handle is an easy to fit and versatile accessory which offers additional support and ease of handling when applying torque with Norbar's powered multipliers

*Suitable for use with 80 series only
*Not suitable for use with 52 and 68 series



(180280)

Right Angle Gearbox

The Right Angle Gearbox will provide most ET, PTS™ and PTM tools with a 90° angle of operation, enabling the operator to reach more applications where access is restricted and limited



(16074)

Lubro Control Unit

Norbar's standard filter, regulator, lubricator unit features a large, 100mm diameter gauge for easy and accurate setting of air pressure



(16075)

Twin Lubro Control Unit

The same features as Norbar's standard filter, regulator, lubricator unit, with additional benefits of two regulators and a switch that allows quick selection between two air pressure settings

GLOBAL SERVICE

Norbar is the only torque equipment manufacturer capable of offering tool and instrument calibration services to the original factory standard on four continents.

Accredited laboratories in Australia, USA, Singapore, China and India operate the same equipment and procedures as the UKAS accredited laboratory within our headquarters in the UK.



NORBAR TORQUE TOOLS LTD
Wildmere Road, Banbury, Oxfordshire, OX16 3JU
UNITED KINGDOM
Tel + 44 (0)1295 753600
Email sales@norbar.com



NORBAR TORQUE TOOLS
45-47 Raglan Avenue, Edwardstown
SA 5039
AUSTRALIA
Tel + 61 (0)8 8292 9777
Email enquiry@norbar.com.au



NORBAR TORQUE TOOLS INC
36400 Biltmore Place, Willoughby
Ohio 44094
USA
Tel + 1 866 667 2272
Email inquiry@norbar.us



SNAP-ON TOOLS SINGAPORE PTE LTD
25 Tagore Lane #01-02
SINGAPORE 787 602
Tel + 65 6841 1371
Email enquiries@norbar.sg



NORBAR TORQUE TOOLS (SHANGHAI) LTD
91 Building- 7F, No. 1122, North Qinzhou Road
Xuhui District, Shanghai
CHINA 201103
Tel + 86 21 6145 0368
Email sales@norbar.com.cn



NORBAR TORQUE TOOLS INDIA PVT. LTD
Plot No A – 168 Khairne Industrial Area
Thane Belapur Road
Mahape Navi Mumbai – 400 709
INDIA
Tel + 91 22 2778 8480
Email enquiry@norbar.in

www.norbar.com



Part number 07581 | Issue 4

NORBAR PRODUCT PORTFOLIO



Torque Screwdrivers



Torque Wrenches



Electronic Torque Wrenches



Manual Torque Multipliers



Pneumatic Torque Tools



Electronic Torque Tools



Battery Torque Tools



Torque Measurement Instruments



Torque Transducers



Ultrasonic Bolt Measurement



Calibration Services

Get more information from your nearest distributor:

RenQuip Ltd

Unit 1 Dunnottar House,
Howe Moss Drive, Dyce, Aberdeen, AB21 0FN

Tel: +44(0) 1224001861

Email: info@renquip.com




© Norbar Torque Tools Ltd 2022
Printed in the UK



PNEUTORQUE® PTS™
ACCURATE, EFFICIENT, QUIET
PNEUMATIC TORQUE TOOLS



NORBAR HAVE COMBINED A NEW AIR MOTOR, THE RESULT OF AN EXTENSIVE DESIGN PROJECT, WITH THEIR RESPECTED GEARBOXES TO DELIVER THE PTS™ RANGE OF ACCURATE, EFFICIENT, QUIET PNEUMATIC MULTIPLIERS

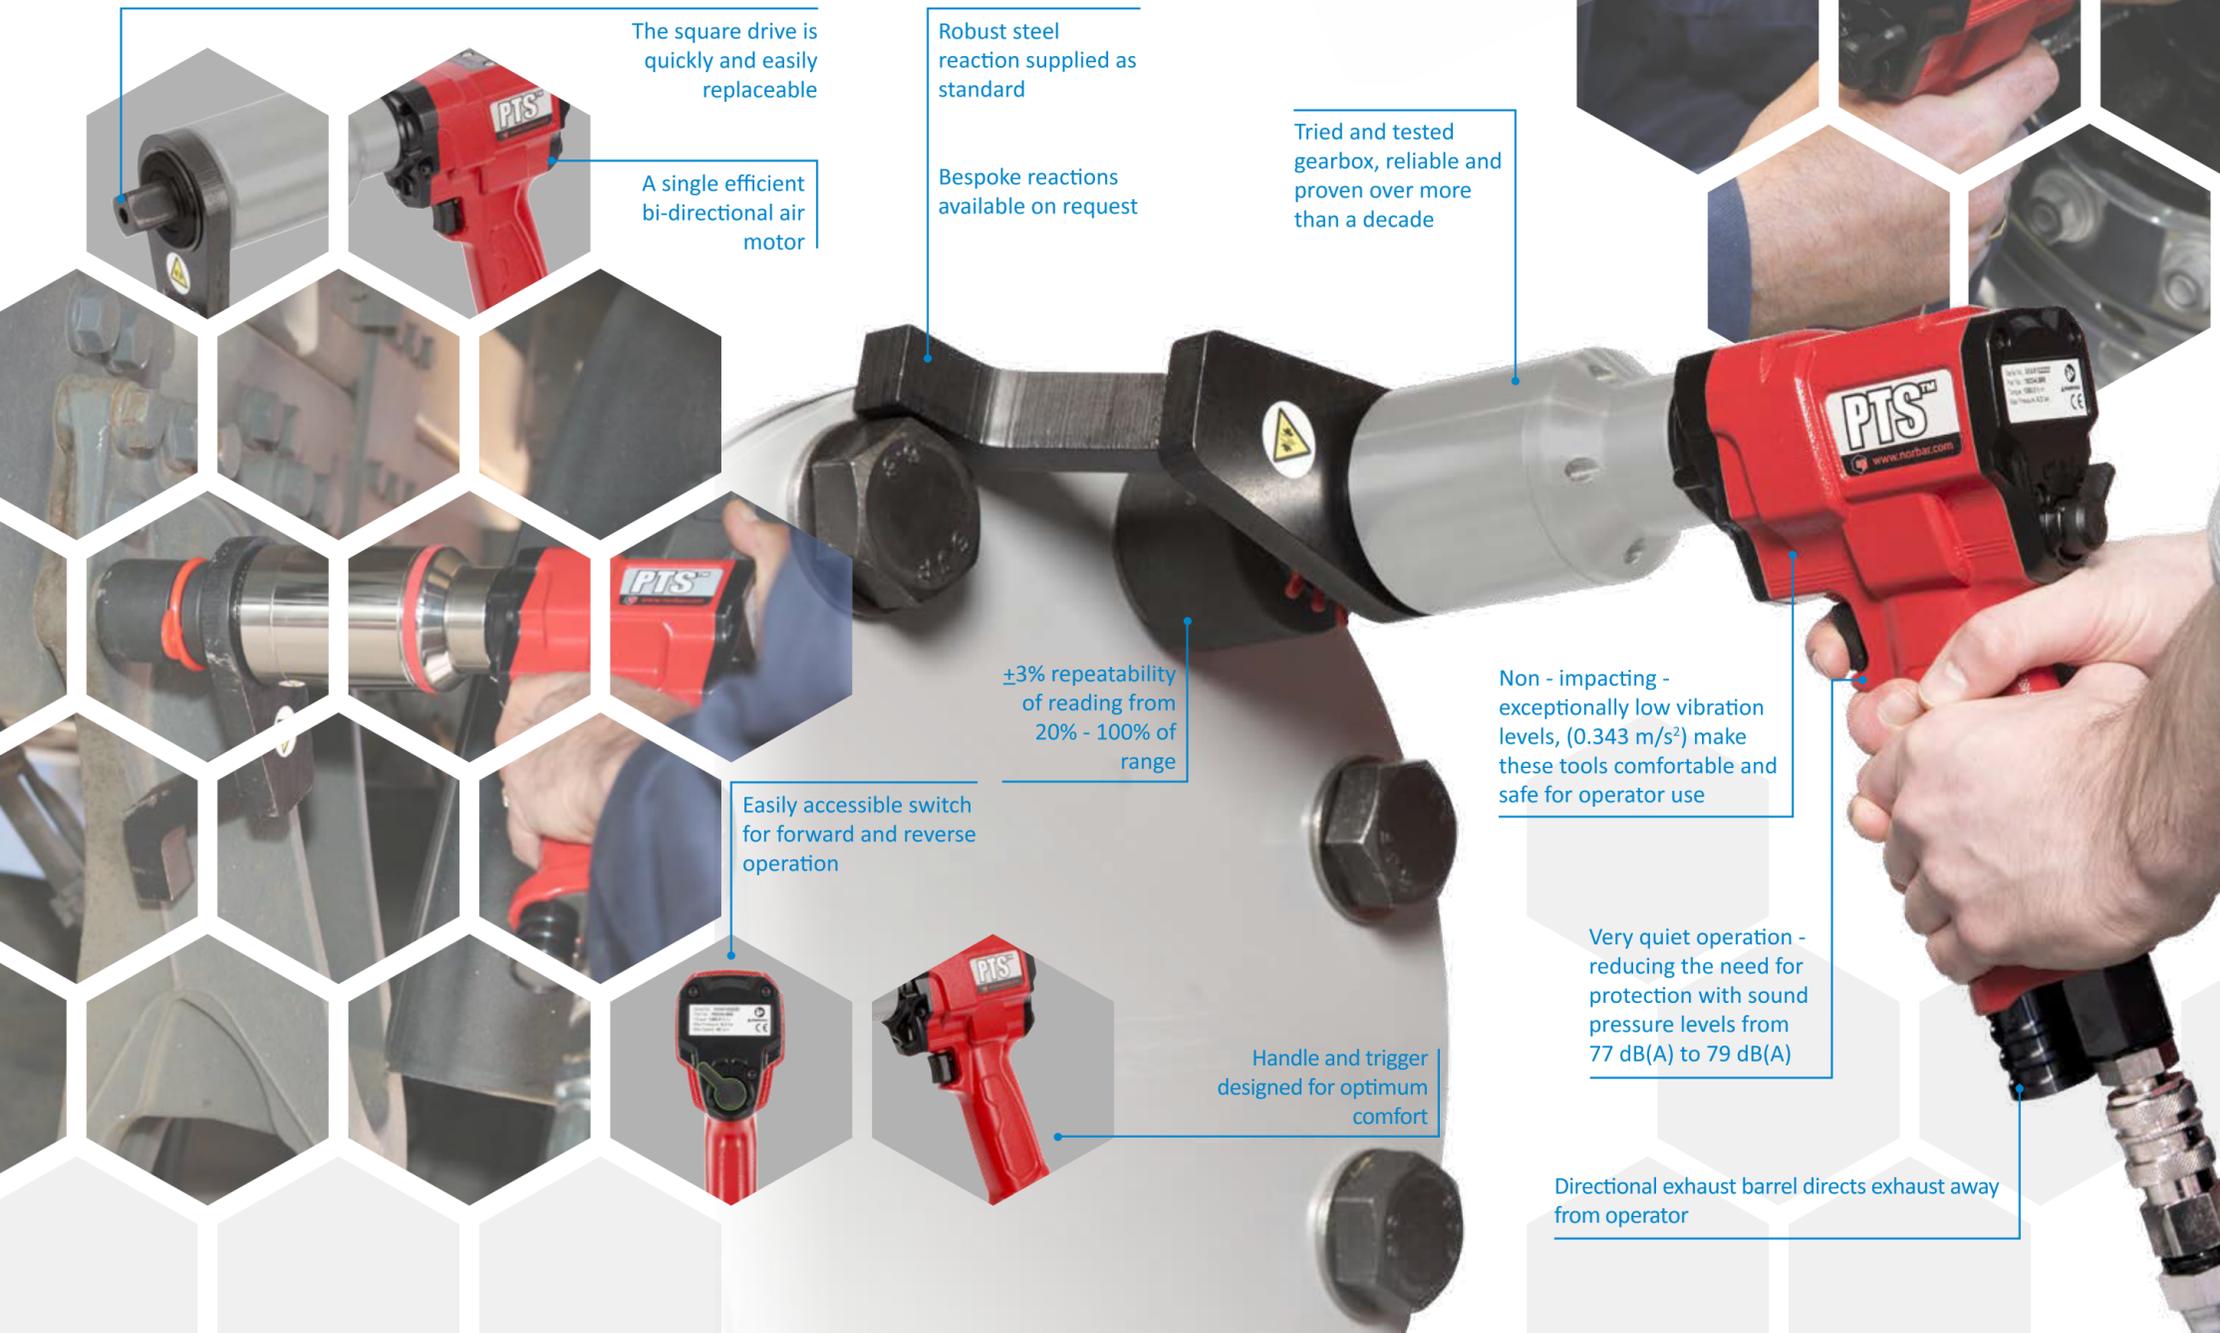

The square drive is quickly and easily replaceable

A single efficient bi-directional air motor

Robust steel reaction supplied as standard

Bespoke reactions available on request

Tried and tested gearbox, reliable and proven over more than a decade

±3% repeatability of reading from 20% - 100% of range


Easily accessible switch for forward and reverse operation

Handle and trigger designed for optimum comfort

Non - impacting - exceptionally low vibration levels, (0.343 m/s²) make these tools comfortable and safe for operator use

Very quiet operation - reducing the need for protection with sound pressure levels from 77 dB(A) to 79 dB(A)

Directional exhaust barrel directs exhaust away from operator

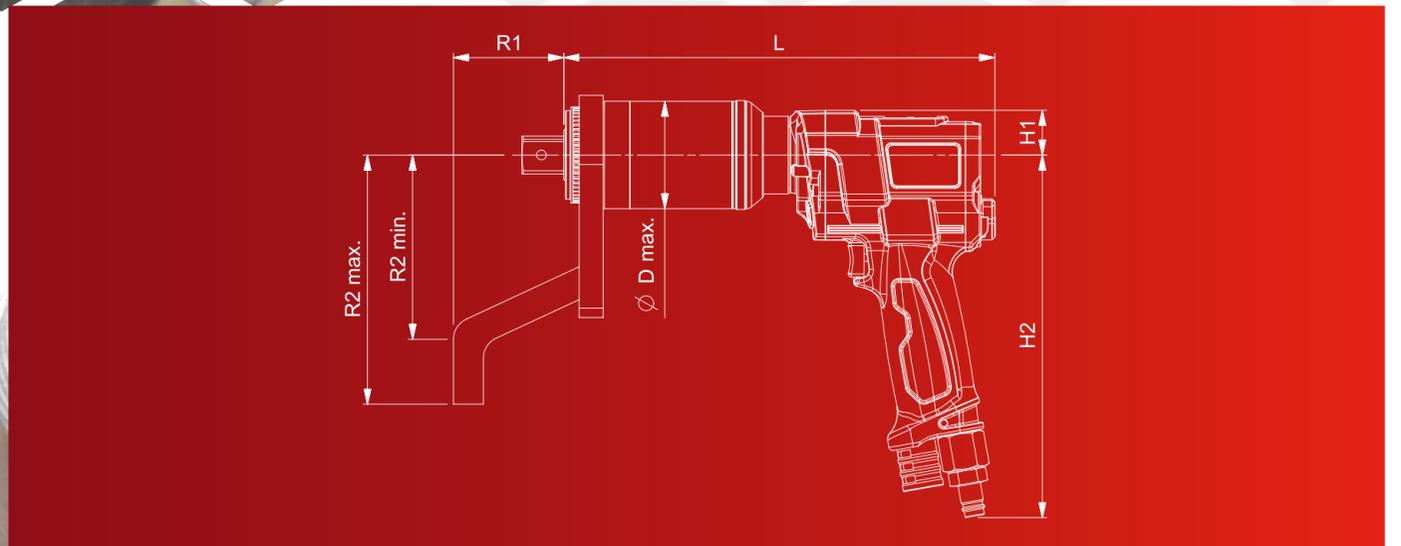

TECHNICAL SPECIFICATION

PART NUMBER	MODEL	SQUARE DRIVE	RANGE		DIMENSIONS (mm)							TOOL WEIGHT (kg)	REACTION WEIGHT (kg)	OUTPUT SPEED (rpm)
			N-m	lbf-ft	∅D max.	H1	H2	L	R1	R2 min.	R2 max.			
180241.B06	PTS-52-500	3/4"	100 - 500	74 - 370	52	30	243	264	59	71	131	4.2	0.9	35.5
180242.B06	PTS-52-800	3/4"	160 - 800	118 - 590	52	30	243	264	59	71	131	4.2	0.9	25.7
180243.B06	PTS-72-1000	3/4"	200 - 1000	147 - 738	72	30	243	292	74	124	165	6.2	1.4	20.4
180781	PTS-72-1000 Auto 2 Speed	3/4"	200 - 1000	147 - 738	72	30	243	310	74	124	167	6.28	1.4	100
180244.B08	PTS-72-1350	1"	270 - 1350	200 - 1000	72	30	243	292	74	124	165	6.2	1.4	14.7
180782	PTS-72-1350 Auto 2 Speed	1"	270 - 1350	200 - 1000	72	30	243	310	74	124	167	6.28	1.4	75
181454	PTS-68-2000	1"	400 - 2000	295 - 1475	68	30	243	285	74	120	165	5.35	1.1	9.2
180246.B08	PTS-80-2700	1"	540 - 2700	398 - 1991	80	30	243	291	74	124	165	6.2	1.4	7.3
180784	PTS-80-2700 Auto 2 Speed	1"	540 - 2700	398 - 1991	80	30	243	327	74	124	167	7.45	1.4	30
180250.B08	PTS-92-4000	1"	800 - 4000	590 - 2950	92	30	243	343	74	125	175	8.59	2.5	5.3
180785	PTS-92-4000 Auto 2 Speed	1"	800 - 4000	590 - 2950	92	30	243	374	75	125	175	8.89	2.5	22
180249.B12	PTS-119-7000	1 1/2"	1400 - 7000	1030 - 5200	119	30	243	369	90	162	210	12.5	3.8	2.6
180788	PTS-119-7000 Auto 2 Speed	1 1/2"	1400 - 7000	1030 - 5200	119	30	243	369	90	162	210	12.80	4.0	13